



# .177" (4.5 mm) Pitch Connection System

## 45001TM

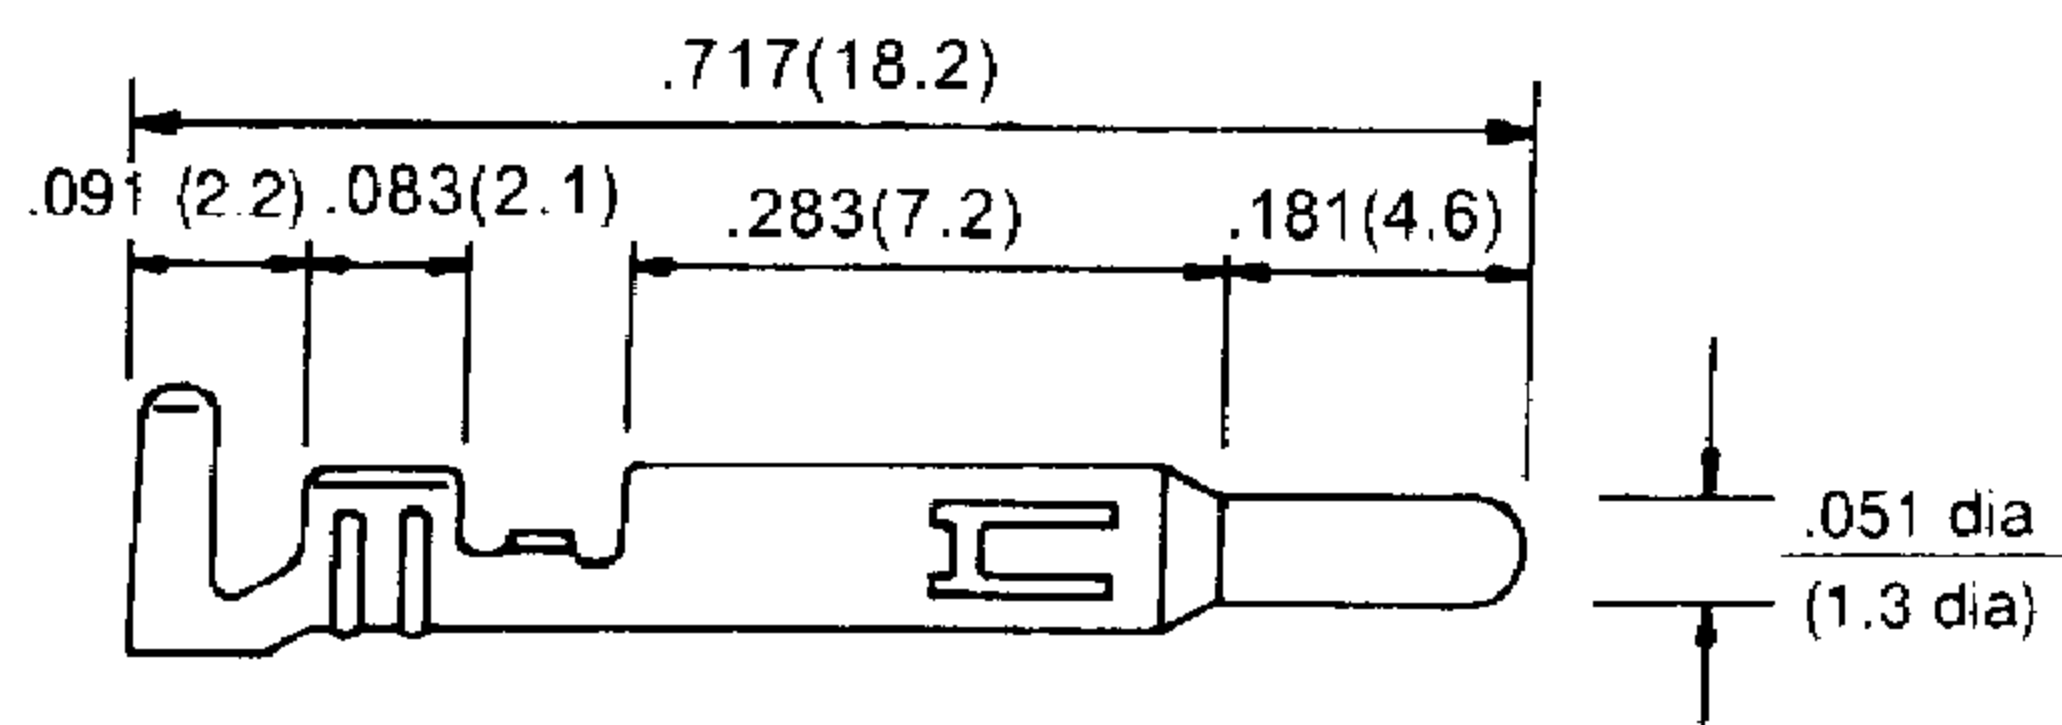

## 45001TF

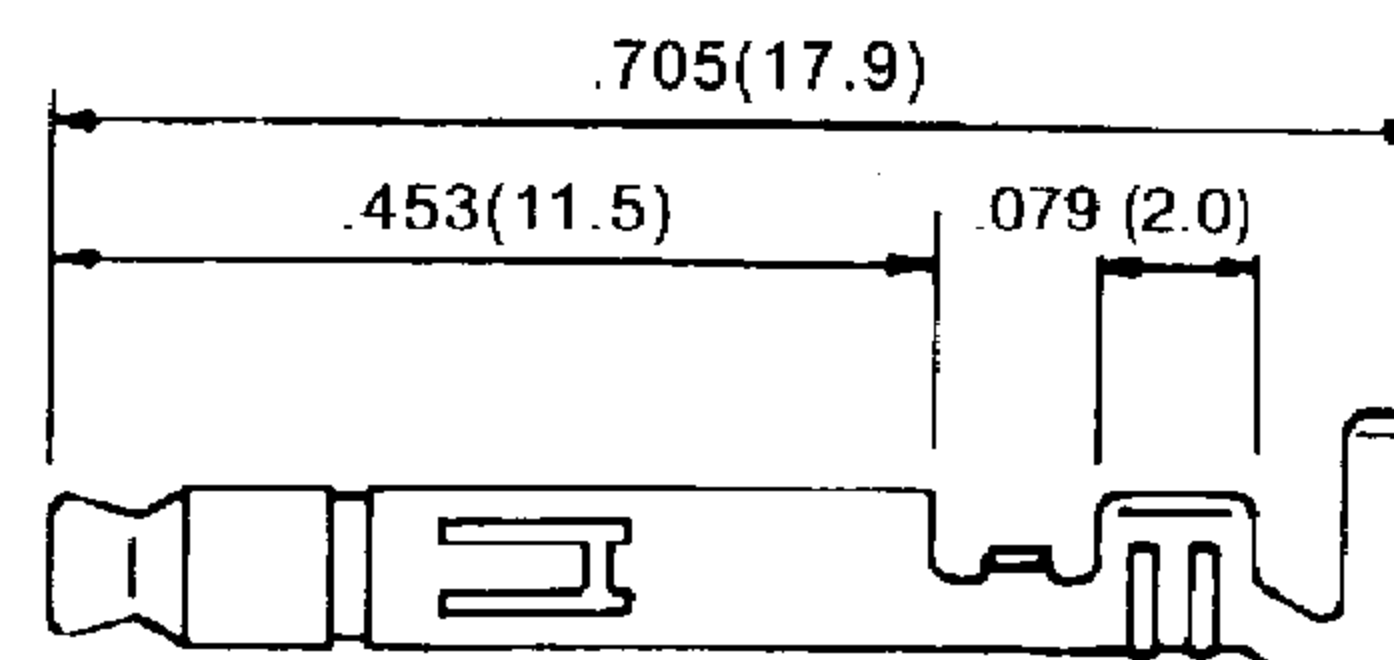

### Specifications

- Current rating: 10A AC, DC max.
- Voltage rating: 300V AC, DC
- Temperature range: -25°C ~ +90°C (including temperature rise)
- Contact resistance: Initial value/7mΩ max. After environmental testing/10mΩ max.
- Insulation resistance: 1,000MΩ min.
- Withstand voltage: 1,500V AC/minute
- Applicable wires: AWG #20 ~ #16 0.5 ~ 1.25 mm<sup>2</sup>
- Applicable panel thickness: .031" ~ .079" (0.8 ~ 2.0mm)

## 45001H-N Series

- Integrally molded polarization
- 94V-0 nylon
- Accepts 45001T crimp type terminal
- 2, 3, 4, 6, 9, 12, 15 circuit versions
- Positive locking
- Standard color: white

Circuits	Max. Rated		Dimensional Information			
	Amps	Voltage	Plug		Receptacle	
2	10A	300V	45001HFE-02 		45001HM-02 	
3	10A	300V	45001HFE-03 		45001HM-03 	
4	10A	300V	45001HFE-04 		45001HM-04 	